

CR-uSF HDMI 200R-D-4K

HDMI/FIBER Receiver



CR-uSF HDMI 200R-D-4K

Product overview

CR-uSF HDMI 200R-D-4K, a 4K fiber transmitter, is a new generation of audio, video and control signal transmitter which was updated on the basis of the previous digital transmitter. Using the advanced optical transmission technology, the maximum transmission distance can reach 1km, the maximum resolution can reach 4K x 2K, and the serial transmission of KVM and any baud rate can be supported on the basis of single fiber transmission medium.


It is widely used in panel display and large videowall display, advertising project, automatic industrial control, medical equipment, security monitoring and multi-media education and other fields.

Features

- Support HDMI 1.4, HDMI1.3a, compatible with HDCP, DVI1.0;
- Digital audio embedded with HDMI output;
- Support bi-directional RS-232 KVM transmission;
- Support simultaneous transmission of video, audio and RS-232.

Specifications

The parameter name	CR-uSF HDMI 200R-D-4K
Supported protocols	HDMI1.4, HDCP1.3a, EDID1.4
PIXEL bandwidth	300MHz, full digital
Interface bandwidth	more than 12Gbps
Maximum supported resolution	any resolution from input is supported
Signal type	HDMI 1.4 / T.M.D.S. full digital signal
Interface	HDMI-A interface
Signal strength	T.M.D.S. +/- 0.4Vpp
Max/Min level	T.M.D.S. 2.9V/3.3V
Impedance	100Ω
Audio input	HDMI embedded with audio input
The recommended maximum input distance	Less than 7 meters. in the 4Kx2K(recommended using the certified HDMI special wire, such as Molex TM wire)

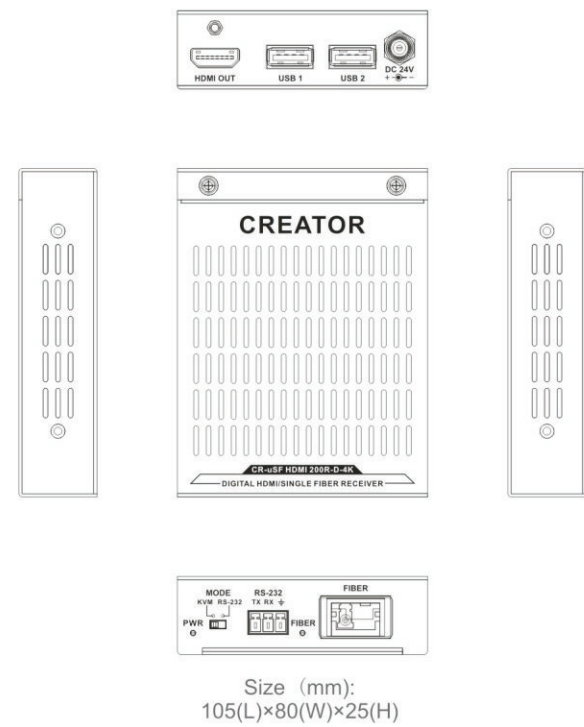

Specifications

The parameter name	CR-uSF HDMI 200R-D-4K
Serial port	RS-232
Baud rate	110-115200bps
KVM control	USB port
Output interface	Fiber interface
Maximum distance	1 KM
Power	DC 12V/1.5A
Maximum power dissipation	3W

System diagram

